




Bearing industry Co., Ltd

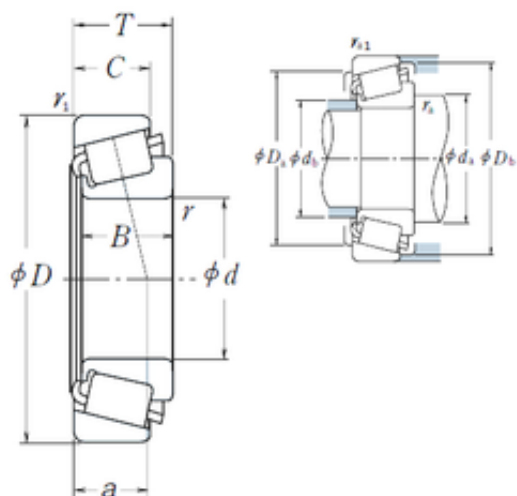

NSK 56425/56650 SINGLE-ROW BEARINGS

Bearing No. 56425/56650

Dimensione	107.95x165.1x36.512 mm
Marchio	NSK
Diametro del foro	107,95 mm
Diametro esterno	165,1 mm
Larghezza	36,512 mm
d	107,95 mm
D	165,1 mm
T	36,512 mm
B	36,512 mm
C	26,988 mm
ra1 max.	3,3 mm
a	38,6 mm
r min.	3,5 mm
r1 min.	3,3 mm
Da	149 mm
db	117 mm
ra max.	3,5 mm
da	123 mm
Db	159 mm
Peso	2,661 Kg
Carico dinamico di base (C)	195 kN
Carico statico di base (C0)	320 kN
(Grease) Velocità di lubrificazione	2000 r/min
(Olio) Velocità di	2600 r/min

56425/56650 Bearing 2D drawings and 3D CAD models



Bearing industry Co., Ltd

lubrificazione	
Fattore di calcolo (e)	0,5
Fattore di calcolo (Y0)	0,66
LangID	1
ALP23	0
esterno r	3.3
ALP22	38
D_	165.1
ALP21	36
SHOG_yobi	56425/56650
RAr	248.996
r interno	3.5
GRS rpm	2000
D_b	159
D_a	149
DE_	148.273
SLR	25.65
Prod_Type3	TRBSR_ID_A
BETA_	1
ALPHA_	18.333
SDM_	136.155
DA1	13.759
DA2	12.347
hidYobi	56425/56650
Y1	1.2
B_	36.512
Numero di giri dell'olio	2600
Tavolo nascosto	ecat_NSTPRI
Y0	0.66
ra interno	3.5
rb esterno	3.3
C0	320



Bearing industry Co., Ltd

CUP	0.861
e	0.5
DA_	13.059
BET21	3
BET22	10
BET23	0
Z_	27
C_	26.988
yobi	56425/56650
KBRG	3161
CONE	1.8
DI_	123.528